


Návod na konfiguráciu routru TP-LINK rady WR74X


platí pre individuálne pripojenie

**pri prípojkách s káblovým/optickým rozvodom
je konfigurácia individuálna**

Napájací zdroj typu MIKROTIK

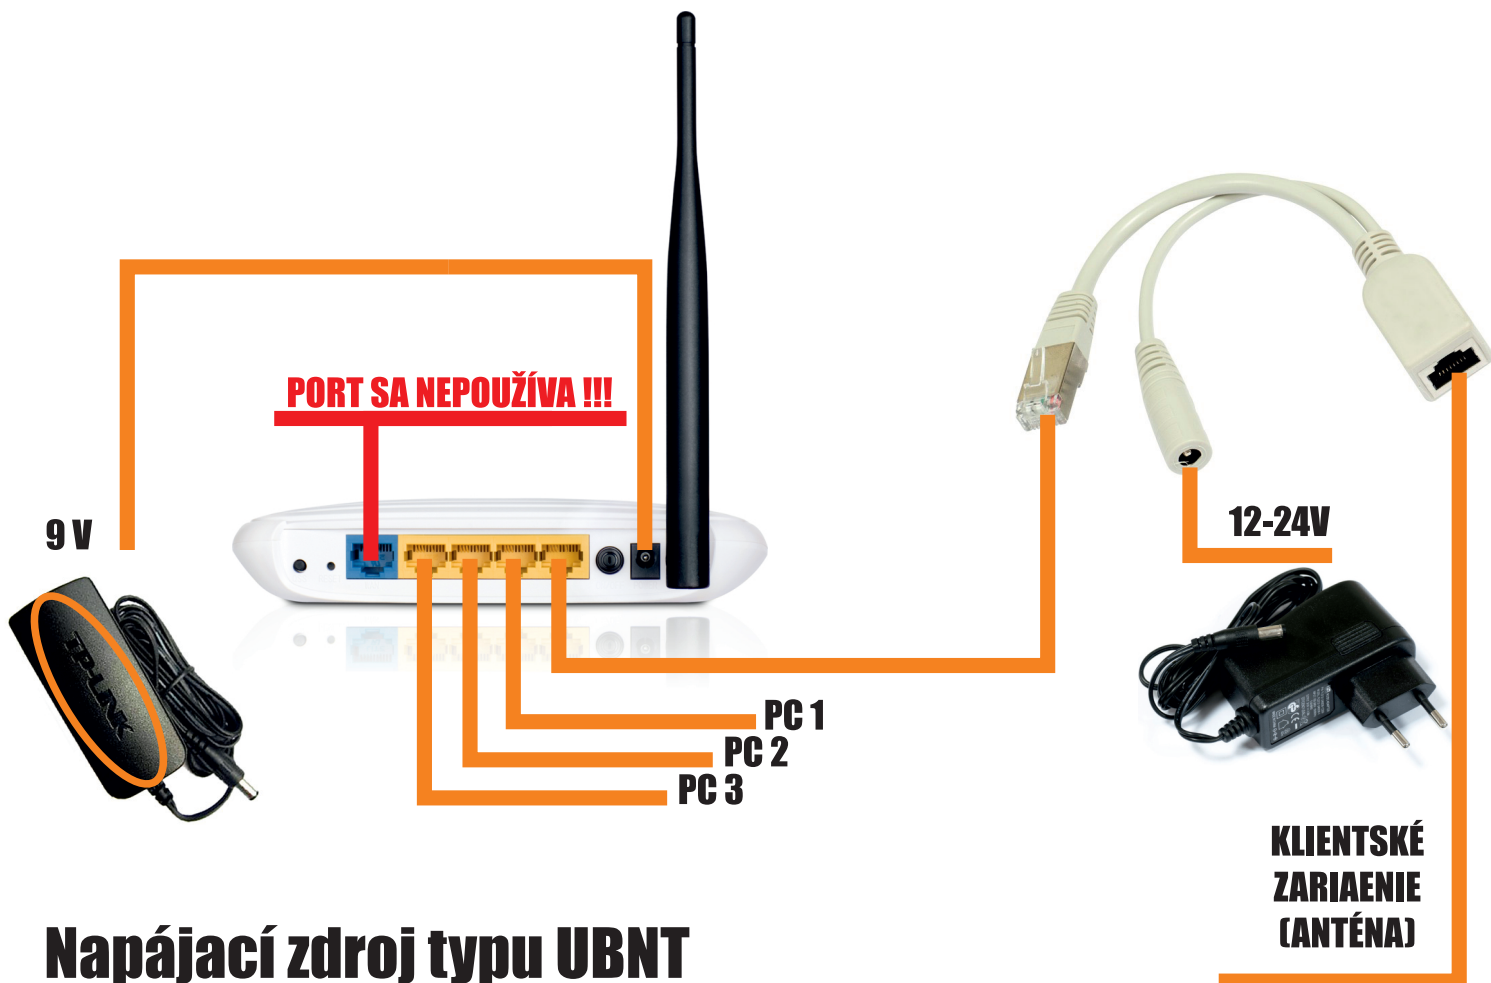

Napájací zdroj typu UBNT

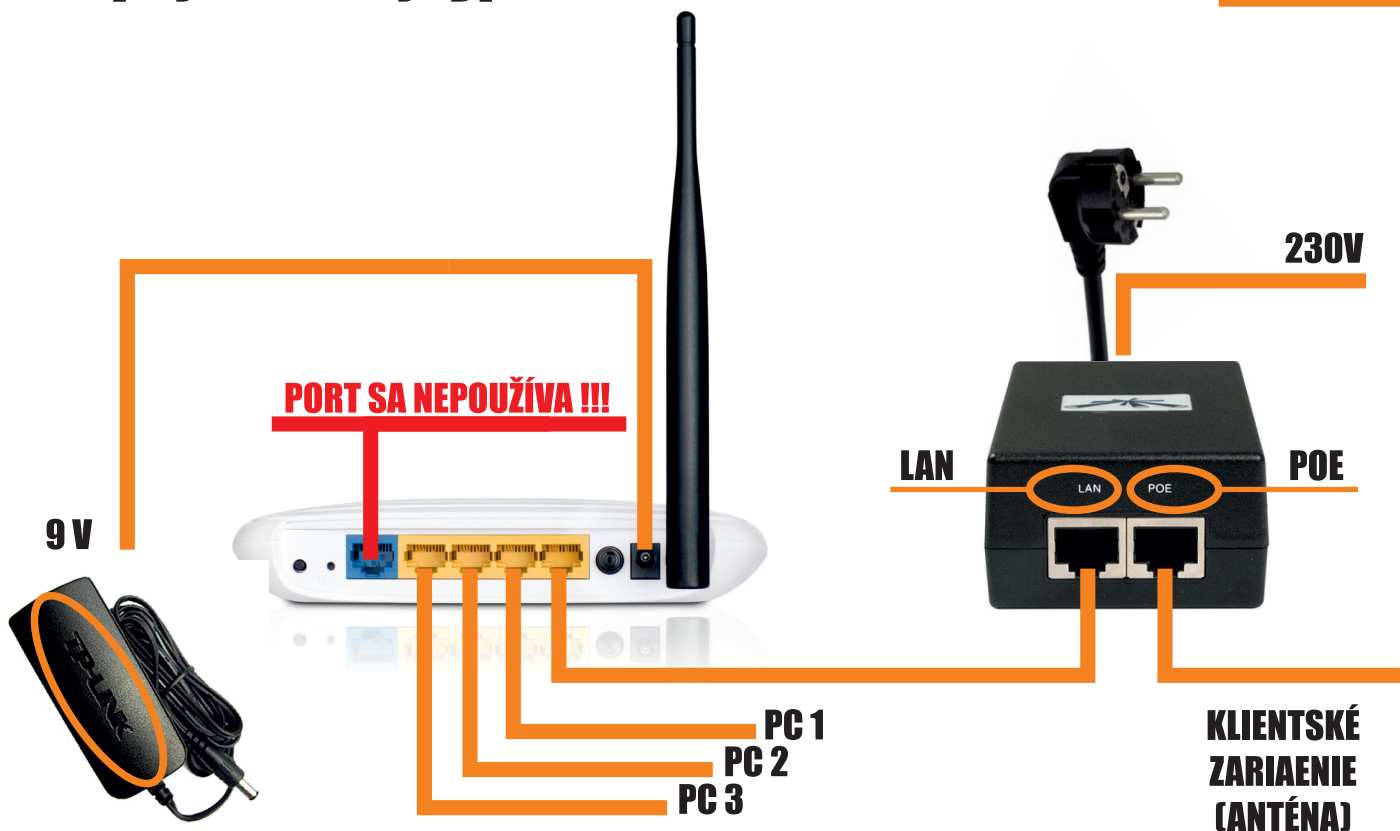


1. Prihlásenie do routru (pripojenie LAN káblom)

Vo webovom prehliadači napr: Internet Explorer, Mozilla Firefox, Chrome,...

IP adresa: 192.168.0.1


meno: admin

heslo: admin

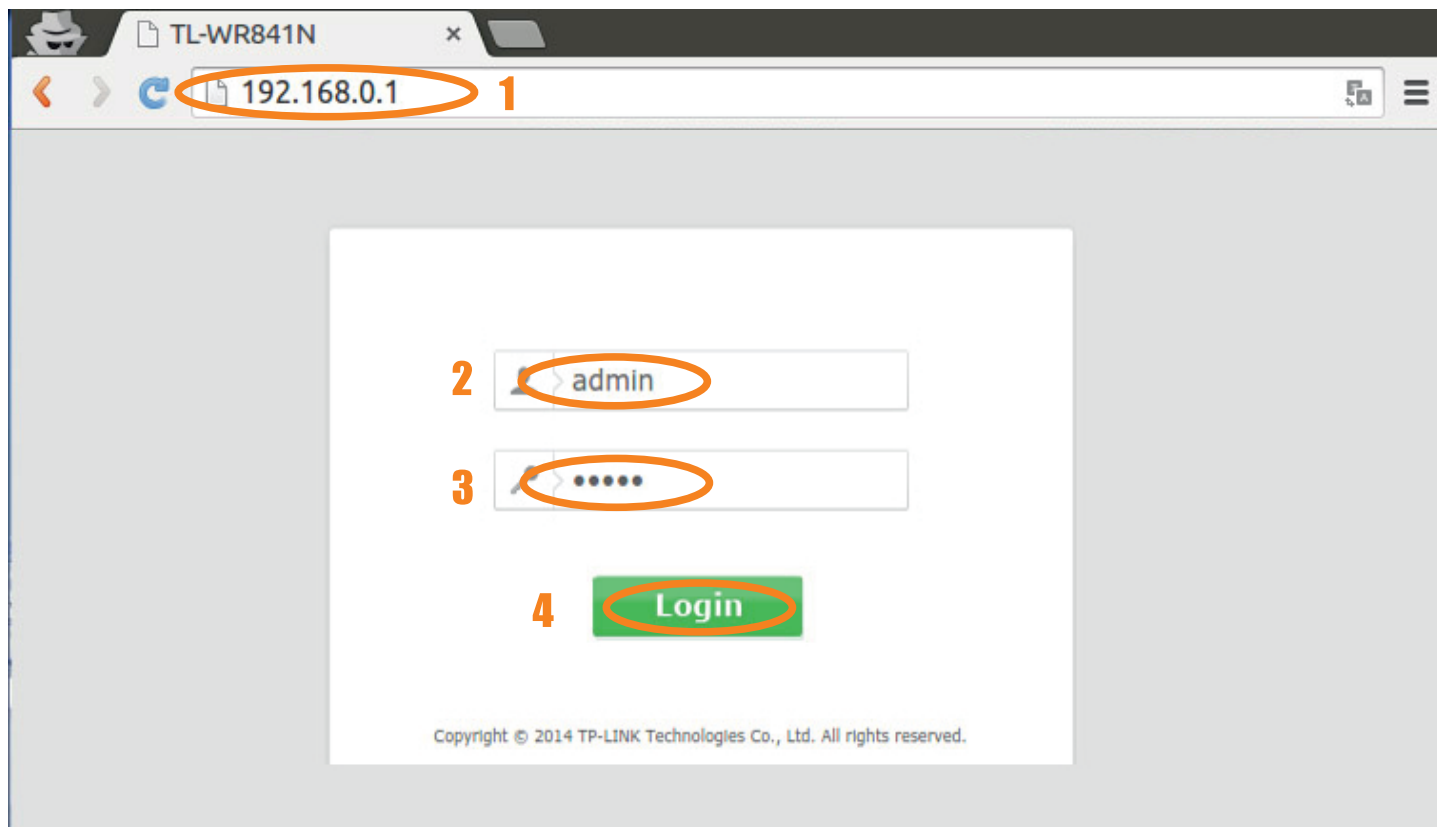

2. Záložka QSS

QSS Status: Disabled

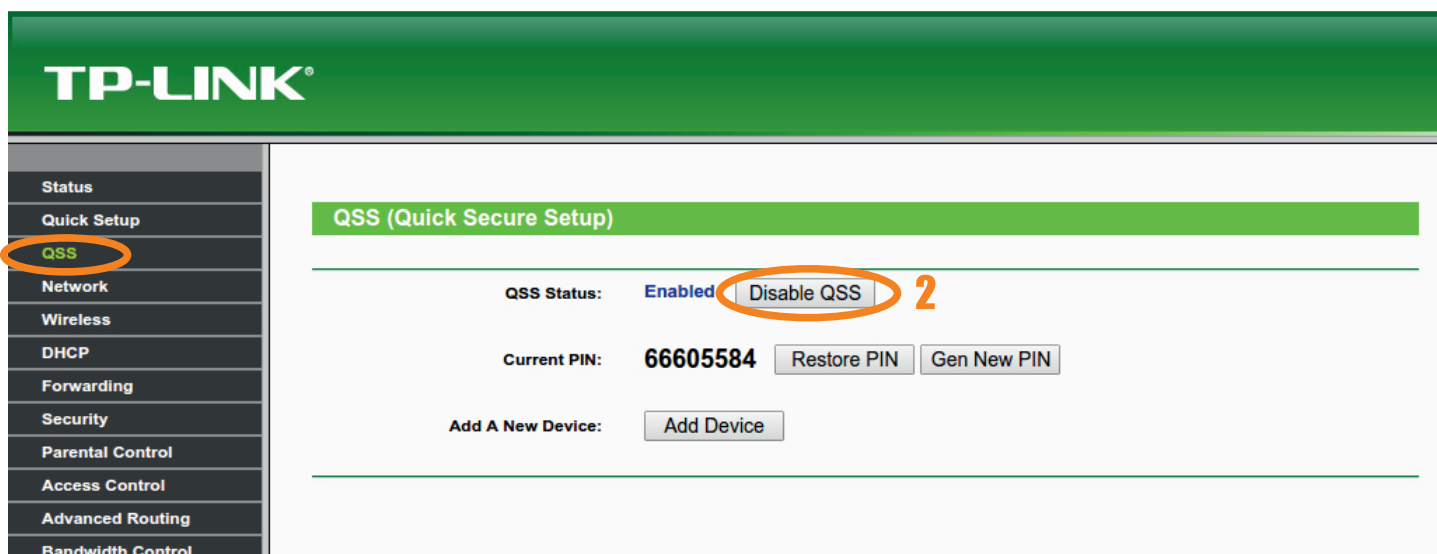

3. ZMENA IP ADRESY NA LAN PORTOCH

IP: Address: 192.168.1.2

Subnet Mask: 255.255.255.0

IGMP Proxy: Disable

SAVE - router sa rebootne

TP-LINK®

1 Status
2 Quick Setup
3 QSS
4 Network
5 - WAN
6 - LAN
7 - MAC Clone
8 Wireless
9 DHCP
10 Forwarding
11 Security
12 Parental Control

LAN

MAC Address: A0-F3-C1-C3-5B-1E

IP Address: 192.168.1.2

Subnet Mask: 255.255.255.0

5 Save

4. Prihlásenie do routru

IP adresa: 192.168.1.2

meno: admin

heslo: admin

TL-WR841N

192.168.1.2

2 admin

3

4 Login

5. Nastavenie WiFi

3. Názov wifi siete

4. Výber krajiny

6. Číslo wifi kanálu

1
2

The screenshot shows the TP-LINK router's configuration interface. On the left is a navigation menu with the following items: Status, Quick Setup, QSS, Network, **Wireless**, - Wireless Settings, - Wireless Security, - Wireless MAC Filtering, - Wireless Advanced, - Wireless Statistics, DHCP, Forwarding, Security, Parental Control, Access Control, Advanced Routing, Bandwidth Control, IP & MAC Binding, and Dynamic DNS. The 'Wireless' menu item is highlighted in green, and '- Wireless Settings' is circled in orange and labeled with the number '2'. The main content area is titled 'Wireless Settings' and contains the following fields and options:

- Wireless Network Name:** A text input field containing 'meno wifi', circled in orange and labeled with the number '3'. A note next to it says '(Also called the SSID)'.
- Region:** A dropdown menu showing 'Slovak Republic', circled in orange and labeled with the number '4'.
- Warning:** A text block stating: 'Ensure you select a correct country to conform local law. Incorrect settings may cause interference.'
- Channel:** A dropdown menu showing '1', circled in orange and labeled with the number '5'.
- Mode:** A dropdown menu showing '11bg mixed'.
- Channel Width:** A dropdown menu showing '20MHz', circled in orange and labeled with the number '6'.
- Enable Wireless Router Radio
- Enable SSID Broadcast
- Enable WDS Bridging

At the bottom of the page, a 'Save' button is circled in orange and labeled with the number '7'.

6. Nastavenie zabezpečenia WiFi

6. heslo do siete (minimálne 8 znakov)

1
2

- Status
- Quick Setup
- QSS
- Network
- Wireless
- Wireless Security
- Wireless MAC Filtering
- Wireless Advanced
- Wireless Statistics
- DHCP
- Forwarding
- Security
- Parental Control
- Access Control
- Advanced Routing
- Bandwidth Control
- IP & MAC Binding
- Dynamic DNS
- System Tools

Type: Automatic

WEP Key Format: Hexadecimal

Key Selected	WEP Key (Password)	Key Type
Key 1: <input type="radio"/>	<input type="text"/>	Disabled
Key 2: <input type="radio"/>	<input type="text"/>	Disabled
Key 3: <input type="radio"/>	<input type="text"/>	Disabled
Key 4: <input type="radio"/>	<input type="text"/>	Disabled

WPA/WPA2 - Enterprise

Version: Automatic

Encryption: Automatic

Radius Server IP:

Radius Port: 1812 (1-65535, 0 stands for default port 1812)

Radius Password:

Group Key Update Period: 0 (in second, minimum is 30, 0 means no update)

WPA/WPA2 - Personal(Recommended)

Version: WPA2-Personal

Encryption: AES

Password: heslonawifi

(You can enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

Group Key Update Period: 0 Seconds (Keep it default if you are not sure, minimum is 30, 0 means no update)

3

7

4
5
6

6. Nastavenie zabezpečenia WiFi

6. heslo do siete (minimálne 8 znakov)

TP-LINK®

Status
Quick Setup
WPS
Network
Wireless
1 **DHCP**
2 - DHCP Settings
- DHCP Client List
- Address Reservation
Forwarding
Security
Parental Control
Access Control
Advanced Routing
Bandwidth Control

DHCP Settings

DHCP Server: Disable Enable

Start IP Address: 192.168.0.100

End IP Address: 192.168.0.199

Address Lease Time: 120 minutes (1~2880 minutes, the default value is 120)

Default Gateway: 192.168.0.1

Default Domain: (Optional)

Primary DNS: 0.0.0.0 (Optional)

Secondary DNS: 0.0.0.0 (Optional)

Save 4

7. Nastavenie zabezpečenia WiFi

Quick Setup
WPS
Network
Wireless
DHCP
Forwarding
1 **Security**
2 - Basic Security
- Advanced Security
- Local Management
- Remote Management
Parental Control
Access Control
Advanced Routing
Bandwidth Control
IP & MAC Binding
Dynamic DNS
System Tools
Logout

Basic Security

Firewall

SPI Firewall: Enable Disable 3

VPN

PPTP Passthrough: Enable Disable

L2TP Passthrough: Enable Disable

IPSec Passthrough: Enable Disable

ALG

FTP ALG: Enable Disable

TFTP ALG: Enable Disable

H323 ALG: Enable Disable

RTSP ALG: Enable Disable

SIP ALG: Enable Disable

Save 4

8. Reboot zariadenia pre aplikáciu zmien

- Status
- Quick Setup
- WPS
- Network
- Wireless
- DHCP
- Forwarding
- Security
- Parental Control
- Access Control
- Advanced Routing
- Bandwidth Control
- IP & MAC Binding
- Dynamic DNS
- 1 System Tools**
- Time Settings
- Diagnostic
- Firmware Upgrade
- Factory Defaults
- Backup & Restore
- 2 - Reboot**

Reboot

Click this button to reboot this device.

Reboot **3**

10. Zmena hesla do rozhrania routru

- Status
- Quick Setup
- WPS
- Network
- Wireless
- DHCP
- Forwarding
- Security
- Parental Control
- Access Control
- Advanced Routing
- Bandwidth Control
- IP & MAC Binding
- Dynamic DNS
- 1 System Tools**
- Time Settings
- Diagnostic
- Firmware Upgrade
- Factory Defaults
- Backup & Restore
- Reboot
- 2 - Password**
- System Log

Password

Username and password can contain between 1 - 15 characters and may not include spaces.

Old User Name:	<input type="text" value="admin"/>	admin
Old Password:	<input type="password" value="....."/>	admin
New User Name:	<input type="text" value="admin"/>	admin
New Password:	<input type="password" value="....."/>	nové heslo
Confirm New Password:	<input type="password" value="....."/>	nové heslo

3 Save
Clear All